



МАРТ

Е-МАРТ
ВАШ ПОСТАВЩИК
ZKTECO

<https://emart.su/brands/zkteco/>

Федеральный	8 800 511-77-41
Санкт-петербург	8 812 426-99-66
Москва	8 495 137-99-67
Краснодар	8 861 205-62-66

www.emart.su

mail@emart.su

D2



Countertop Time Attendance Terminal



IOS QR Code



Android QR Code

D2 Tabletop Terminal is specially designed for table or counter use (80-140cm). With fingerprint sensor placed on top of terminal, it enables all-directional fingerprint reading for the convenience of attendance. BioID high sensitivity fingerprint sensor provides faster and more accurate fingerprint verification. With built-in detachable battery lasting for up to 8 hours, and micro-USB power supply for power bank (minimum 2A) connection, there are no more worries for lacking power sockets supply.

Features



Countertop placed without installation



Wi-Fi communication



Build in battery up to 8 hour standby



Build in time attendance report



Mobile APP control and download report




USB Microport for DC power bank charge available

Specification

Product	D2	
Capacity	Max User(1:N) Max Fingerprint (1:N) Max Record	1,000 1,000 50,000
Interface	Wi-Fi USB	WLAN / Hot Spot USB 2.0 (Host)
Hardware	LCD Sound Operating Temp. Operating Humidity Power Battery Dimensions(W x H x D mm)	2.8" Color LCD 24-bit 0 °C- 45 °C 20% ~ 80% DC 5V 2A 4,000 mAh 170.0 x 84.0 x 84.9
Function	Standard	Automatic Status Switch, Self-Service Query, SSR DST, T9 Input, 9 Digit User ID, Scheduled Bell
Compatibility	ZKTime.net 3.0 ZKTime 5.0 ZKAccess 3.5	

Configuration

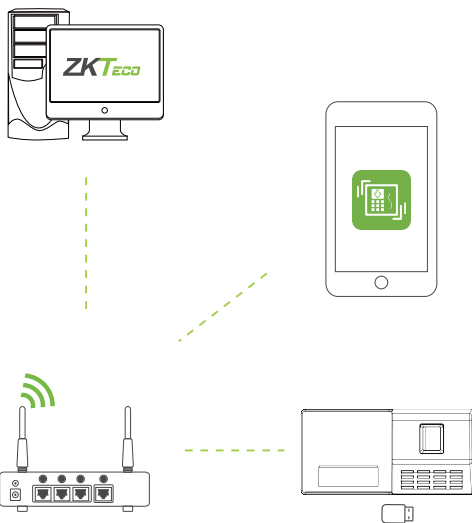

Dimensions (mm)

